

### DCQA\_(C)-xx Series



CE Report

RoHS




### FEATURES

- Wide operating temperature range : -40°C to +105°C
- Up to 87% efficiency
- No load current as low as 5mA
- Isolation voltage 3.5KVAC/6KVDC
- Sustainable short-circuit protection
- 3 Years Warranty

### DESCRIPTION

IGBT/SiC MOSFET driver specific DC/DC module power supply, constant voltage input, isolated, non regulated, positive and negative dual output, SIP packaging.

### MODEL NUMBERING

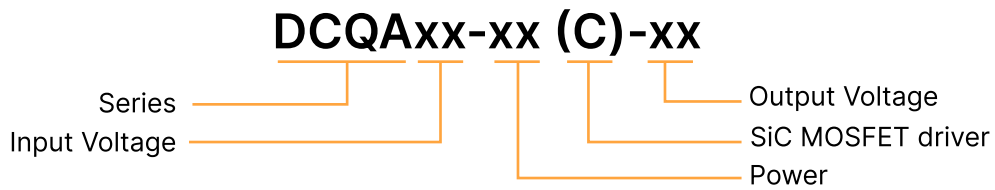

### SELECTION GUIDE

Product Model	Input Voltage Standard Value (range)	Input current (mA, Typ.) Full load/No load	Output Voltage	Output Current (mA) (Max./Min.)	Efficiency % (Min./Typ.)	Maximum Capacitive load (µF)
DCQA05-1C-2005	5VDC (4.5-5.5)	456/53	+20/-5.0	+80/-40	75/79	100
DCQA05-3C-1505		343/20	+15/-5.0	+80/-40	76/83	1000
DCQA05-3C-1803		415/20	+18/-3.0	+80/-40	76/83	680
DCQA05-3C-2004		407/18	+20/-4.0	+80/-40	76/83	470

## DC-DC CONVERTERS

Product Model	Input Voltage Standard Value (range)	Input current (mA, Typ.) Full load/No load	Output Voltage	Output Current (mA) (Max./Min.)	Efficiency % (Min./Typ.)	Maximum Capacitive load (μF)
DCQA12-3C-1502	12VDC (10.8-13.2)	167/8	+15/-2.5	+100/-100	75/88	2200
DCQA12-1C-1503		210/15	+15/-3.5	+111/-111	75/81	220
DCQA12-3C-1504		215/8	+15/-4.0	+120/-120	75/88	2200
DCQA12-3C-1803		200/8	+18/-3.0	+100/-100	75/88	2200
DCQA12-01C-2004		240/20	+20/-4.0	+100/-100	75/80	220
DCQA12-1C-2005		260/20	+20/-5.0	+100/-100	75/80	220
DCQA12-3C-2005		213/14	+20/-5.0	+90/-90	75/88	1000
DCQA15-1C	15VDC (13.5-16.5)	151/15	+15/-4.0	+100/-100	75/82	220
DCQA15-3C-1504		171/8	+15/-4.0	+120/-120	75/88	2200
DCQA15-01C-18		177/16	+18/-3.0	+100/-100	75/80	220
DCQA15-3C-1803		167/14	+18/-3.0	+100/-100	75/88	1000
DCQA15-01C-2004		193/16	+20/-4.0	+100/-100	75/80	220
DCQA15-01C-2005		150/20	+20/-5.0	+80/-40	73/76	220
DCQA15-3C-2005		167/8	+20/-5.0	+90/-90	75/88	2200
DCQA24-3C-1504	24VDC (21.6-26.4)	131/10	+15/-4.0	+120/-120	75/88	2200
DCQA24-3C-1803		112/14	+18/-3.0	+100/-100	75/88	1000
DCQA24-01C-20		125/13	+20/-4.0	+100/-100	75/80	220
DCQA24-3C-2005		129/11	+20/-5.0	+90/-90	75/82	2200

## INPUT CHARACTERISTICS


Parameter	Conditions	Min.	Typ.	Max.	Units
Input current (No-load)	Nominal voltage input@48VDC	--	5	20	mA
Reflected ripple current		3	15	20	mA
Input impulse voltage	1sec. max.	-0.7	--	16	VDC
		-0.7	--	13	VDC
		-0.7	--	26	VDC
		-0.7	--	15	VDC
Input filter	Capacitive filtering				

Remarks: This product does not support hot plug

**OUTPUT CHARACTERISTICS**

Parameter	Conditions	Min.	Typ.	Max.	Units
Output voltage accuracy	See Figure 3 (envelope curve)				
Linear regulation rate	Input voltage variation +/- 1%	--	+/-1.2	+/-1.5	
Load regulation rate	10% to 100% load	-Vo	8	12	%
		+Vo	10	20	%
Ripple & Noise	20MHz bandwidth	--	50	120	mVp-p
Dynamic response step deviation		--	+/-3	+/-5	%
Temperature drift coefficient	100% load	--	+/-0.03	--	%/°C
Short circuit protection	Sustainable, Self-healing				

Note: The testing method for ripple and noise is the parallel line testing method.

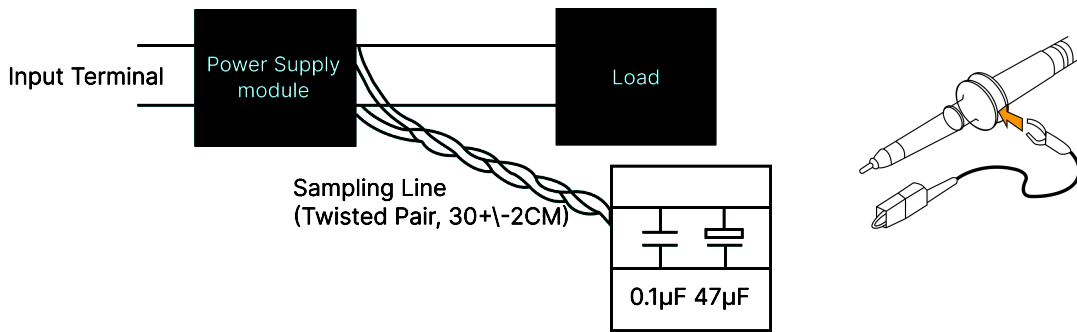

**GENERAL CHARACTERISTICS**

Parameter	Conditions	Min.	Typ.	Max.	Units	
Isolation voltage	Input-output, Test time 1 minute, Leakage current less than 1 mA	IGBT driver	3000	--	--	VAC
		SiC MOSFET driver	3500	--	--	VAC
			6000	--	--	VDC
Insulation resistance	Input-output, Insulation voltage 500VDC	1000	--	--	MΩ	
Isolation capacitance	Input-output, 100KHz/0.1V	--	3	30	pF	
Working temperature	Temperature ≥ 85°C for derating (See Figure 4)	-40	--	+105	°C	
Storage temperature		-55	--	+125	°C	

**GENERAL CHARACTERISTICS**

Parameter	Conditions	Min.	Typ.	Max.	Units
Storage humidity	Non condensing	--	--	95	%RH
Housing temperature rise during operation	Ta=25°C,Nominalinput,Fulloutput	--	15	25	°C
Soldering temperature resistance of pins	The distance from the welding spot to the shell is 1.5mm, 10 seconds	--	--	300	°C
	RE FLOW:Peak temperature Tc≤245°C, maximum time above 217°C for 60 seconds.	--	--	245	°C
Switchingfrequency	Full load, Nominal input voltage	--	270	--	KHz
Meantimebetween failures 【MTBF】	MIL-HDBK-217F@25°C	3500	--	--	kHours

**PHYSICAL CHARACTERISTICS**

Parameter	Contents
Housing material	Black lame retardant and heat-resistant plastic (UL94V-0)
Overall dimensions	19.50 × 9.80 × 12.50mm
Weight	4.2g(Typ.)
Cooling mode	Natural air cooling

**EMC CHARACTERISTICS**

Parameter	Category	Content
EMI	Conductive disturbance	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 2)
	Radiation disturbance	CISPR32/EN55032 CLASS B (The recommended circuit is shown in Figure 2)
EMS	Electrostatic discharge	IEC/EN61000-4-2 Contact ±4KV perf. Criteria B

**CIRCUIT DESIGN AND APPLICATION**

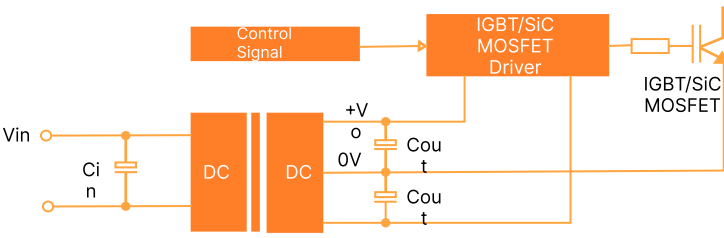


Figure 1: Application circuit

Table 1: Recommended Capacitive Load Values

Vin(VDC)	Cin(μF)	Vo(VDC)	Cout(μF)
Nominal voltage	1-10	Nominal voltage	2.2-22

Table 2: Recommended Circuit Parameter Values

Category	Component	Value
EMI	C1	4.7μF /50V
	C2	4.7μF /50V
	C3,C4	2.2-22μF /50V
	CY	270pF/2kV
	LDM	6.8μH

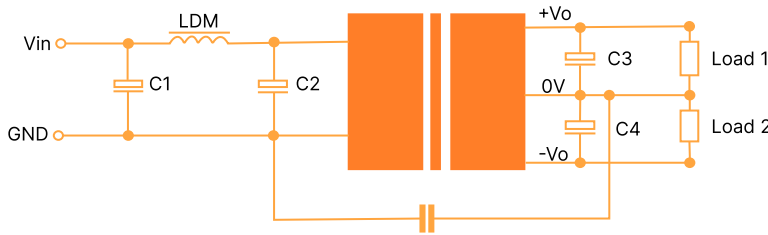


Figure 2: EMC Typical Recommended Circuits

1. Typical application: If further reduction of input and output ripple is required, a capacitor Filter network can be connected at the input and output ends. The application circuit is shown in Figure 1. However, suitable Filter capacitors should be selected. If the capacitance is too large, it may cause overcurrent or poor startup of the power supply. For each output, while ensuring safe and reliable operation, the recommended capacitance load values are shown in Table 1.
2. EMC requirements: For situations with high EMC requirements, a typical EMC recommended circuit is shown in Figure 2.
3. Input requirements: Ensure that the Fluctuation range of the input voltage does not exceed the upper and lower limits of the input voltage Specified in this data sheet, and the input power must be greater than the output power Specified in this data sheet. For situations with a 24V input voltage, it is recommended to connect a TVS tube between the positive and negative input pins for protection (recommended parameters for TVS tubes: 30V, bidirectional, SOD-123 packaging).
4. Output load requirements: Try to avoid using it without load as much as possible; When the actual power of the load is less than 10% of the rated output power in this data sheet, or when it needs to be used in no-load situations, it is recommended to connect a load resistor externally at the output end. The load resistor can be calculated according to 5-10% of the rated power in this data sheet. The calculation formula for the load resistor value is  $R_L = V_{out}^2 / (P_{out} * 10\%)$ .
5. Overload protection: Under normal working conditions, the output circuit of this product has no protection function for overload situations. The simplest method is to connect a self recovery fuse in series at the input end, or add a circuit breaker outside the circuit; Or during design and selection, the actual power of the circuit should be around 60-80% of the rated power in this data sheet.

### PRODUCT CHARACTERISTIC CURVE

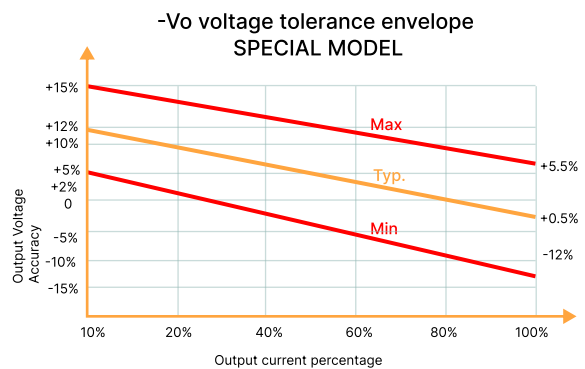
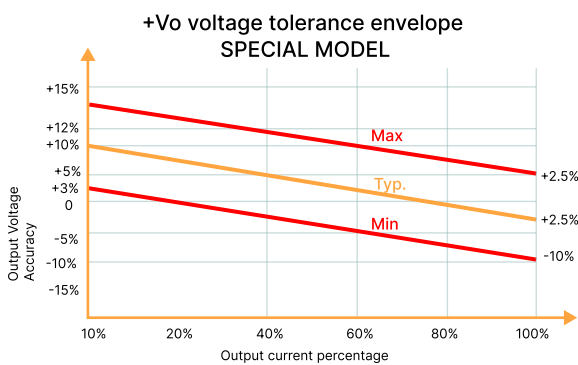
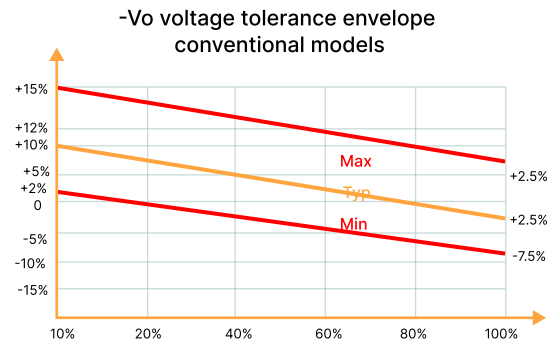
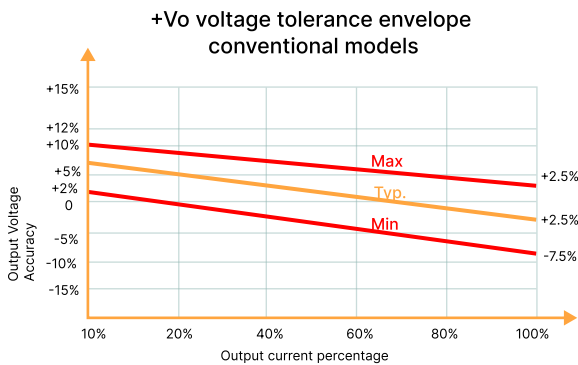


Figure 6: Efficiency Vs Input Voltage (100% Load)





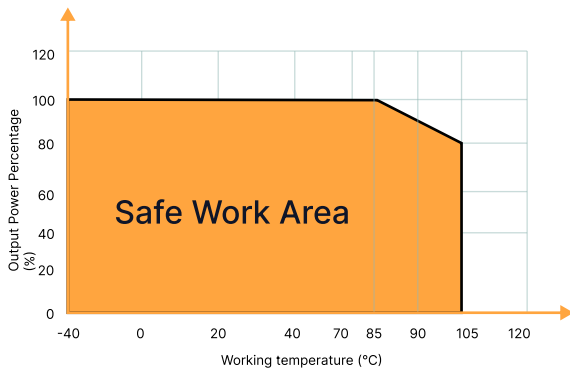


Figure 5: Efficiency Vs Output Load (Nominal Voltage Input)

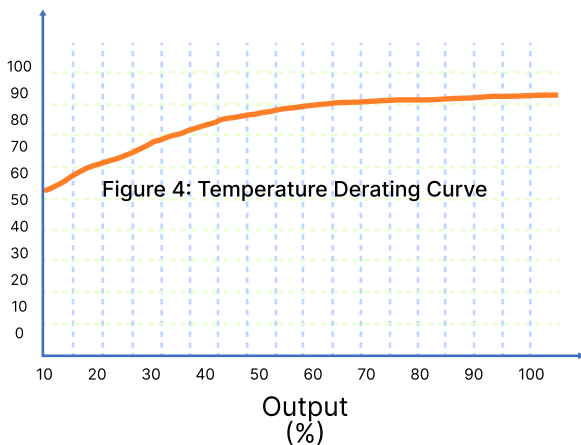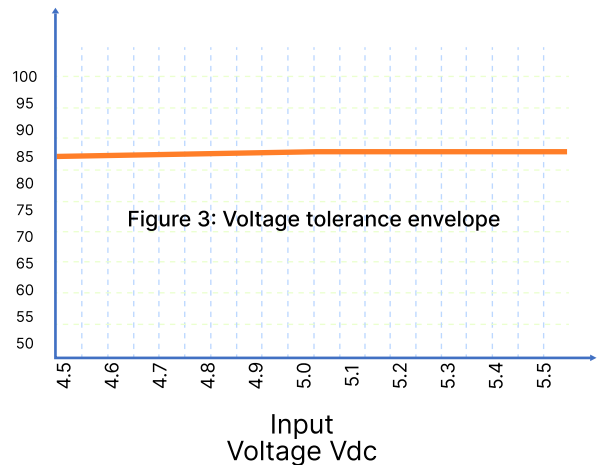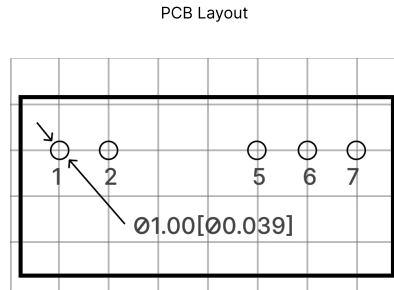

**OVERALL DIMENSIONS AND PIN FUNCTIONS**

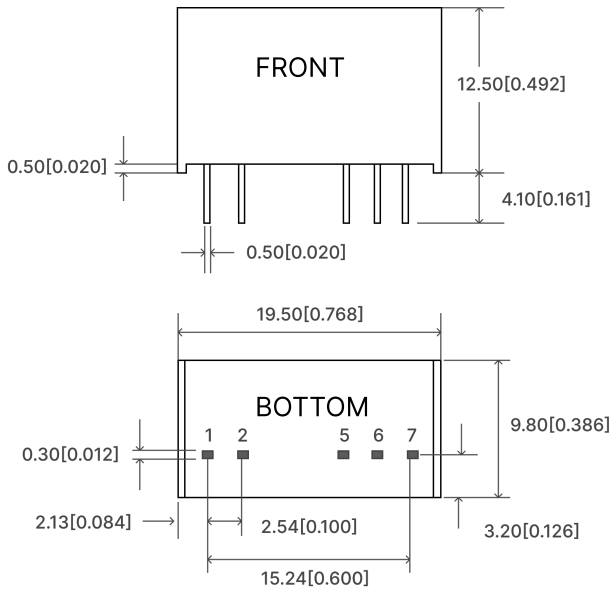


Note: Grid 2.54\*2.54mm

Unit: mm[inch]  
Pin diameter tolerances: ±0.10  
General tolerances: ±0.50


**Table 3: Pin Function Table**

Pin	Function
1	Vin
2	GND
5	-Vo
6	0V
7	+Vo


**PACKAGING METHOD**



18 Pieces/Tube



486 Pieces/Inner box



2430 Pieces/Outer box

**NOTES & INSTRUCTIONS**

- 1.The input voltage shall not exceed the specified range value, otherwise permanent and unrecoverable damage maybe caused;
2. Unless otherwise specified,the parameters in this manual are measured at 25 °C,40%~75% humidity, input nominal voltage and output pure resistance mode under full load;
- 3.All index test methods are based on the company's enterprise standards.
- 4.The copyright and the final interpretation right of the product belong to RHENXV.