


### DCWA\_YD-15W Series




### FEATURES

- Wide voltage range input (4:1)
- Working temperature range: -40°C To +105°C
- Up to 85% efficiency
- Output short circuit, overcurrent, overload protection
- 3 Years Warranty

### DESCRIPTION

DC-DC Module Power Supply, Wide Voltage Input, Power 15W, Isolated, Regulated, Positive And Negative Dual Output, DIP Packaging

### MODEL NUMBERING

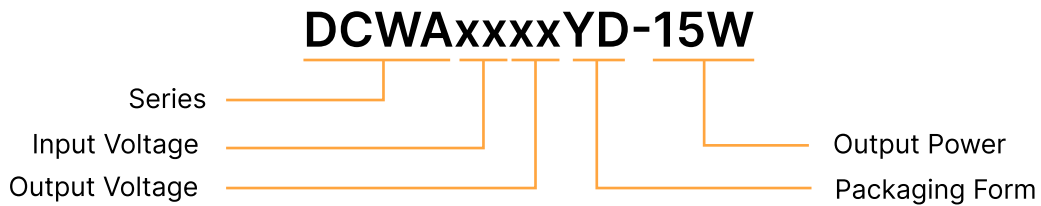

### SELECTION GUIDE

| Product Model  | Input Voltage<br>Standard Value(range) | Output<br>Voltage | Output<br>Current (mA)<br>(Max./Min.) | Efficiency %<br>(Min./Typ.) | Maximum<br>capacitive load<br>( $\mu$ F) |
|----------------|--|-------------------|---------------------------------------|-----------------------------|--|
| DCWA2403YD-15W | 24VDC<br>(9-36)                        | $\pm$ 3.3         | $\pm$ 1800/0                          | 75/78                       | 2400                                     |
| DCWA2405YD-15W |  | $\pm$ 5           | $\pm$ 1500/0                          | 77/80                       | 2400                                     |
| DCWA2409YD-15W |  | $\pm$ 9           | $\pm$ 833/0                           | 77/81                       | 1000                                     |
| DCWA2412YD-15W |  | $\pm$ 12          | $\pm$ 625/0                           | 78/82                       | 1000                                     |
| DCWA2415YD-15W |  | $\pm$ 15          | $\pm$ 500/0                           | 78/82                       | 560                                      |
| DCWA2424YD-15W |  | $\pm$ 24          | $\pm$ 313/0                           | 78/83                       | 560                                      |

| Product Model  | Input Voltage<br>Standard Value(range) | Output<br>Voltage | Output<br>Current (mA)<br>(Max./Min.) | Efficiency %<br>(Min./Typ.) | Maximum<br>capacitive load<br>( $\mu$ F) |
|----------------|--|-------------------|---------------------------------------|-----------------------------|--|
| DCWA4803YD-15W | 48VDC<br>(18-75)                       | $\pm$ 3.3         | $\pm$ 1800/0                          | 75/78                       | 2400                                     |
| DCWA4805YD-15W |  | $\pm$ 5           | $\pm$ 1500/0                          | 77/80                       | 2400                                     |
| DCWA4809YD-15W |  | $\pm$ 9           | $\pm$ 833/0                           | 77/81                       | 1000                                     |
| DCWA4812YD-15W |  | $\pm$ 12          | $\pm$ 625/0                           | 78/82                       | 1000                                     |
| DCWA4815YD-15W |  | $\pm$ 15          | $\pm$ 500/0                           | 78/82                       | 560                                      |
| DCWA4824YD-15W |  | $\pm$ 24          | $\pm$ 313/0                           | 78/83                       | 560                                      |

## INPUT CHARACTERISTICS

| Parameter                             | Operating Conditions                              | Min. | Typ. | Max. | Units |
|---------------------------------------|---|------|------|------|-------|
| Input Current (full load)             | 24VDC nominal input series, nominal input voltage | --   | 720  | 900  | mA    |
|                                       | 48VDC nominal input series, nominal input voltage | --   | 365  | 500  | mA    |
| Input Current (no load)               | 24VDC nominal input series, nominal input voltage | --   | 10   | 15   | mA    |
|                                       | 48VDC nominal input series, nominal input voltage | --   | 6    | 9    | mA    |
| Reflected Ripple Current              | 24VDC nominal input series, nominal input voltage | 30   | 40   | 50   | mA    |
| Input Impulse Voltage<br>(1sec. Max.) | 24VDC nominal input series, nominal input voltage | -0.7 | --   | 50   | VDC   |
|                                       | 48VDC nominal input series, nominal input voltage | -0.7 | --   | 100  | VDC   |
| Start Voltage                         | 24VDC nominal input series, nominal input voltage | --   | --   | 9    | VDC   |
|                                       | 48VDC nominal input series, nominal input voltage | --   | --   | 18   | VDC   |
| Input Under-voltage<br>Protection     | 24VDC nominal input series                        | 5.5  | 6.5  | --   | VDC   |
|                                       | 48VDC nominal input series                        | 12   | 15.5 | --   | VDC   |
| Start-up Time                         | Nominal input voltage & constant resistance load  | --   | 10   | --   | ms    |

| Parameter    | Conditions             | Min.                                     | Typ. | Max. | Units |
|--------------|------------------------|--|------|------|-------|
| Input Filter |                        | Pi filter                                |      |      |       |
| Ctrl *       | Module on              | Ctrl pin open or pulled high (3.5-12VDC) |      |      |       |
|              | Module off             | Ctrl pin pulled low to GND(0-1.2VDC)     |      |      |       |
|              | Input current when off | --                                       | 06   | 07   | mA    |

Remarks: This product does not support hot plug

## OUTPUT CHARACTERISTICS

| Parameter                    | Operating Conditions                             | Min.                      | Typ.  | Max. | Units |
|------------------------------|--|---------------------------|-------|------|-------|
| Voltage Accuracy             | 0%-100% load                                     | --                        | ±1    | ±3   | %     |
| Linear Regulation            | Input voltage variation from low to high at full | --                        | ±0.2  | ±0.5 | %     |
| Load Regulation              | Input voltage variation from low to high at full | --                        | ±0.5  | ±1.5 | %     |
| Ripple & Noise               | Pure resistive load, 20MHz bandwidth             | --                        | 50    | 200  | mVp-p |
| Transient Recovery Time      |  | --                        | 50    | 200  | µs    |
| Transient Response Deviation |  | --                        | ±3    | ±8   | %     |
| Temperature Coefficient      | Full load  | --                        | ±0.03 | --   | %/°C  |
| Over-voltage Protection      | Full voltage range input                         | 110                       | --    | 160  | %Vo   |
| Over-current Protection      |  | 110                       | 200   | 270  | %Vo   |
| Short-circuit Protection     |  | Continuous, self-recovery |       |      |       |

Note:

- ① Output voltage accuracy of ±5VDC/±9VDC output converter for 0%-5% load is ±5% max;
- ② Load regulation for 0%-100% load is ±5%;
- ③ Under 0% -5% load conditions, ripple & noise does not exceed 5%Vo. The "parallel cable" method is used for Ripple and Noise test.

**GENERAL CHARACTERISTIC**

| Parameter                            | Operating Conditions   | Min.                                 | Typ. | Max. | Units  |
|--------------------------------------|--|--------------------------------------|------|------|--------|
| Insulation Voltage                   | Input-output, with the test time of 1 minute and the leak current lower than 1mA | 1500                                 | --   | --   | VDC    |
| Insulation Resistance                | Input-output, isolation voltage 500VDC   | 1000                                 | --   | --   | MΩ     |
| Isolation Capacitance                | Input-output capacitance at 100kHz/0.1V  | --                                   | 2000 | --   | pF     |
| Operating Temperature                | See Fig. 1   | -40                                  | --   | +105 | °C     |
| Storage Temperature                  |  | -55                                  | --   | +125 | %      |
| Storage Humidity                     | Non-condensing   | 5                                    | --   | 95   | °C     |
| Pin Soldering Resistance Temperature | Soldering spot is 1.5mm away from case for 10 seconds                            | --                                   | --   | +300 | °C     |
| Vibration                            |  | 10-55Hz, 10G, 30Min.along X, Y and Z |      |      |        |
| Switching Frequency *                | PWM mode   | --                                   | 270  | --   | KHz    |
| MTBF                                 | MIL-HDBK-217F@25°C   | 1000                                 | --   | --   | khours |

Note: \*Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.  
Mechanical Specifications

**PHYSICAL CHARACTERISTICS**

| Parameter          | Conditions               |
|--------------------|--------------------------|
| Housing material   | Aluminum alloy           |
| Overall dimensions | 25.40 × 25.40 × 13.64 mm |
| Cooling mode       | Free air convection      |

**EMC CHARACTERISTICS**

| Parameter | Category  | Content          |   |                 |
|-----------|---|------------------|---|-----------------|
| EMI       | CE  | CISPR32/EN55032  | CLASS A (without extra components)/ CLASS B (see Fig.2 for recommended circuit) |                 |
|           | RE  | CISPR32/EN55032  | CLASS A (without extra components)/ CLASS B (see Fig.2 for recommended circuit) |                 |
| EMS       | ESD   | IEC/EN61000-4-2  | Contact ±4KV  | perf. CriteriaB |
|           | RS  | IEC/EN61000-4-3  | 10V/m   | perf. CriteriaA |
|           | EFT   | IEC/EN61000-4-4  | ±2KV (see Fig.2)  | perf. CriteriaB |
|           | Surge   | IEC/EN61000-4-5  | line to line ±2KV (see Fig.2)   | perf. CriteriaB |
|           | CS  | IEC/EN61000-4-6  | 3 Vr.m.s  | perf. CriteriaA |
|           | Voltage dips, short interruptions and voltage variations immunity | IEC/EN61000-4-29 | 0%, 70%   | perf. CriteriaB |

**CIRCUIT DESIGN AND APPLICATION**

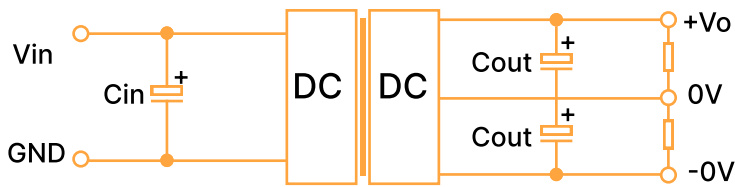


Figure 1: Application circuit

| Vin(VDC) | Cin              | Cout(uF)  |
|----------|------------------|-----------|
| 24       | 100µF/50V        | 10µF/100V |
| 48       | 10µF - 47µF/100V | 10µF/100V |

Table 1: Recommended Capacitive Load Values

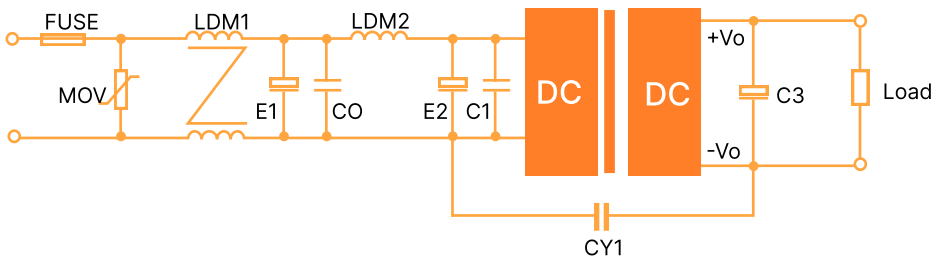


Figure 2: EMC Typical Recommended Circuits

| Category | Component | Value   |
|----------|-----------|---------|
| EMI      | MOV       | 14D560K |
|          | E1/E2     | 100µF   |
|          | C0/C1     | 1µF     |
|          | CY1       | 1nF/2KV |
|          | LDM1      | 10mH    |
|          | LDM2      | 10µH    |

Table 2: Recommended Circuit Parameter Values


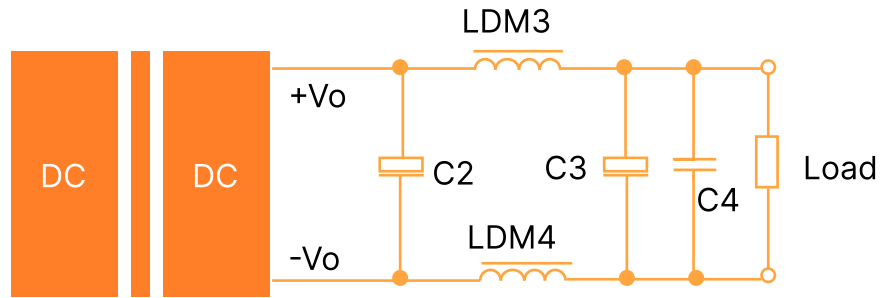


Figure 3: Ripple application and testing

When using in situations with strict requirements for ripple and noise, it is recommended to use the circuit shown in the figure above.

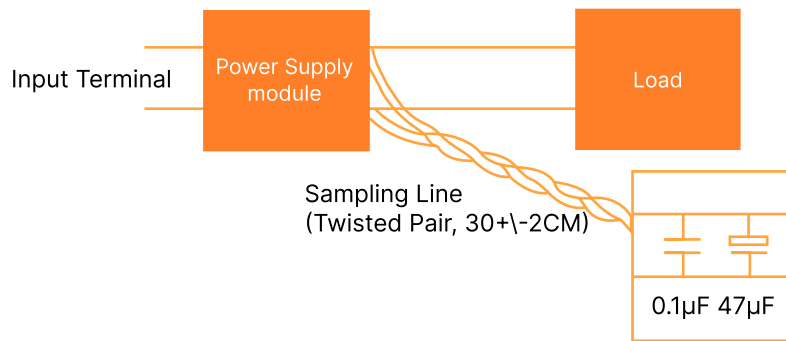

The testing method for ripple and noise is to use a 12 # twisted pair connection, with an oscilloscope bandwidth of 20MHZ and a 100M bandwidth oscilloscope probe. The capacitor shown in the above figure is connected in parallel to the oscilloscope probe, and the sampling mode of the oscilloscope is sample.

## PRODUCT CHARACTERISTIC CURVE

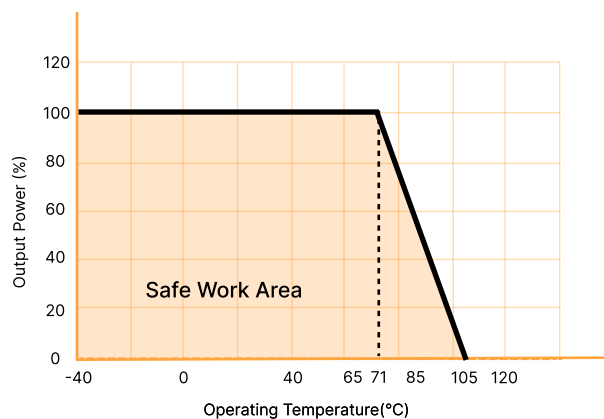


Figure 4: Temperature Derating Curve

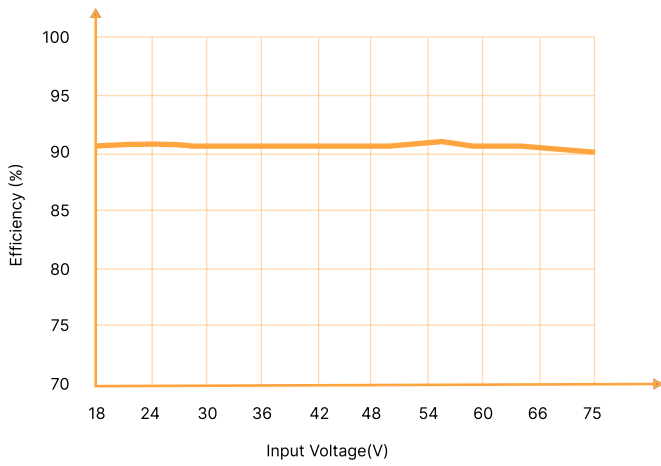


Figure 5: Efficiency Vs Input Voltage (Full Load)



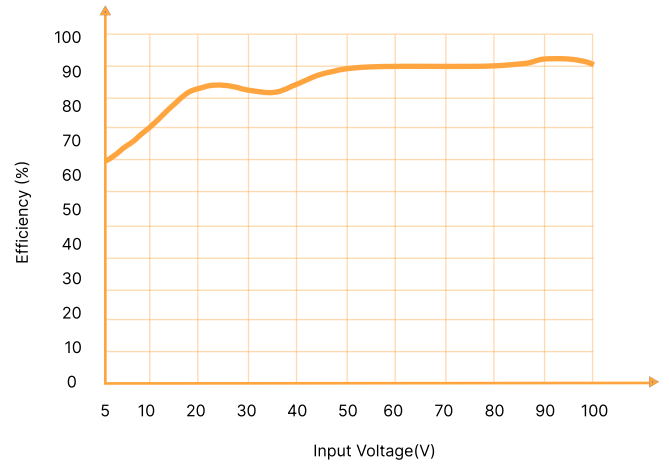


Figure 6: Efficiency Vs Output Load

OVERALL DIMENSIONS AND PIN FUNCTIONS

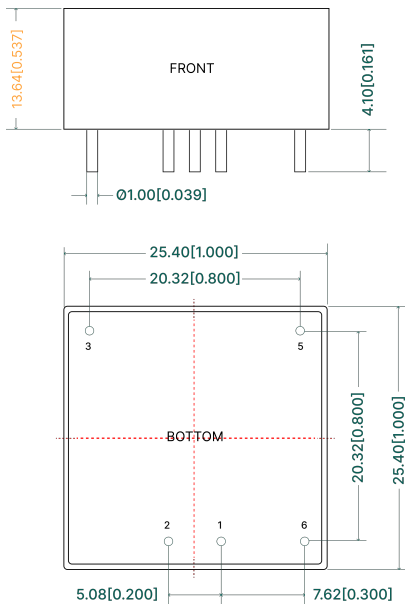

Note: Grid 2.54\*2.54mm


Unit: mm[inch]  
Pin diameter tolerances: ±0.10  
General tolerances: ±0.50

Table 3: Pin Function Table


| Pin | Function |
|-----|----------|
| 1   | GND      |
| 2   | Vin      |
| 3   | +Vo      |
| 4   | 0V       |
| 5   | -Vo      |
| 6   | Ctrl     |

Figure 7: Overall dimensions


PACKAGING METHOD

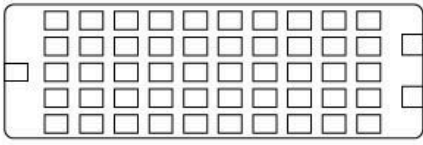

50 Pieces/Tube



100 Pieces/Inner box



500 Pieces/Outer box

NOTES & INSTRUCTIONS

- 1.The input voltage shall not exceed the specified range value, otherwise permanent and unrecoverable damage maybe caused;
2. Unless otherwise specified,the parameters in this manual are measured at 25 °C,40%~75% humidity, input nominal voltage and output pure resistance mode under full load;
- 3.All index test methods are based on the company's enterprise standards.
- 4.The copyright and the final interpretation right of the product belong to RHENXV.